


TECHNICAL DATA SHEET

Diagram

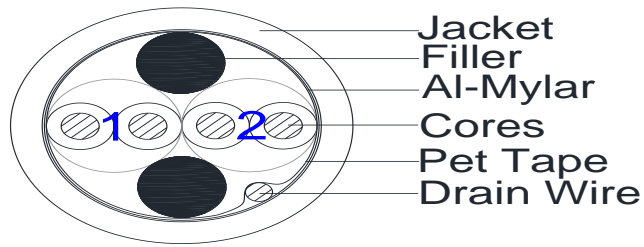

Description	
Cable Part Code*	I2331FF02
Cable Type	2 X 2 X 1.0 mm ² PVC/OS/PVC

Conductor	
Conductor Material	Bare Copper
Conductor Size	1.0 mm ²
Conductor Stranding Standard	IEC 60228-Class-2

Insulation	
No. of Cores/Pair/Triad/Quad	2 Pairs
Insulation Material	PVC
Nom. Insulation Diameter (mm)	2
Insulation Color Code	Black*White,all cores with number coding 1~2

Shielding	
Shielded/Unshielded	Overall BeldFoil Shield Plus Tinned Copper Drain Wire

Outer Jacket/Sheath Material	
Outer Jacket Material	PVC
Nom. Overall Diameter(mm)	8.9

Physical/Mechanical Properties	
Temperature Rating	EN:-30~70°C
Oil Resistance	Yes
UV Resistance	Yes (only black)
Flame Retardant	IEC60332-1
Nom.Cable Weight (kg/km)	95.99

Electrical Properties	
Voltage Rating (V)	300V
Max. Conductor Resistance @20°C	18.462
Max Mutual Capacitance Core to Core @1KHz	250
Max. Inductance to Resistance Ratio L/R	25

*Ordering stock code will be created at the time of placing the order and the stock code will include cable part code, outer jacket color & putup length.

© 2016 Belden, Inc
All Rights Reserved.

Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Belden provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein. All sales of Belden products are subject to Belden's standard terms and conditions of sale.